

THE LOGE HOOD



SPECIFICATIONS

Hood Style

Box

Models

36" : **AH3630LGE**

48" : **AH4830LGE**

Product Dimensions:

HOOD WIDTH X DEPTH X HEIGHT

36"W x 24"D x 30"H, 42"H or 54"H
(600 cfm/8" collar)

48"W x 24"D x 30"H, 42"H or 54"H
(1200 cfm/10" collar)

Product Weight:

36"(30"H) : 104 lbs / 36"(42"H) : 122 lbs /
36"(54"H) : 141 lbs

48"(30"H) : 130 lbs / 48"(42"H) : 151 lbs /
48"(54"H) : 172 lbs

Hood Sone Level:

Ranges from 5-7

Electrical Requirements:

600 CFM models draw approx. 2.7 Amps

1200 CFM models draw approx. 5.4 Amps

COLOR FINISH OPTIONS



Matte Black



White



Gloss Black



Stainless Steel

TRIM FINISH OPTIONS

NOTE: Due to global sourcing, paint and / or trim may have minor variations



Brushed Nickel



Polished Chrome



Brushed Brass



Polished Brass




Antique Brass



Satin Chrome


THE LOGE HOOD

DIMENSIONAL DRAWINGS

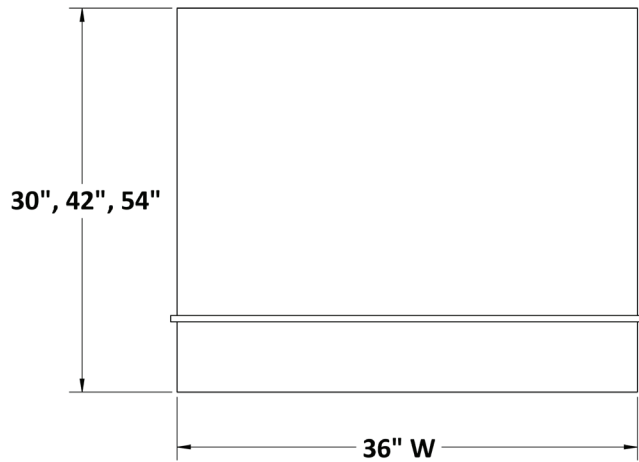


36" FRONT VIEW

(37" width with 1/2" bands)

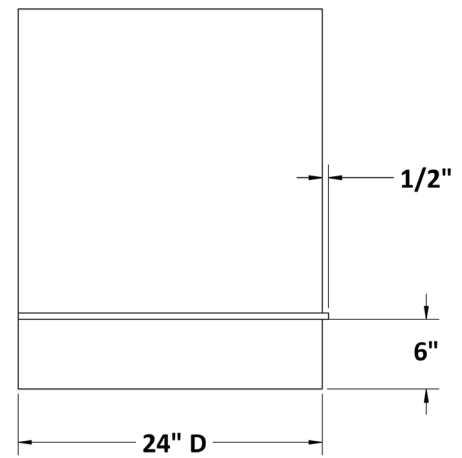


36" SIDE VIEW

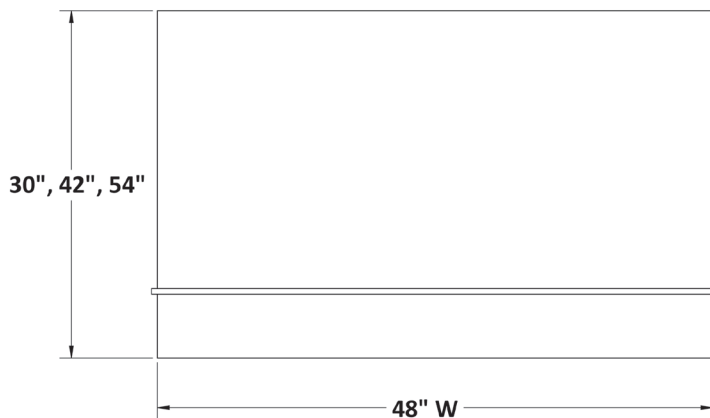

48" FRONT VIEW

(49" width with 1/2" bands)

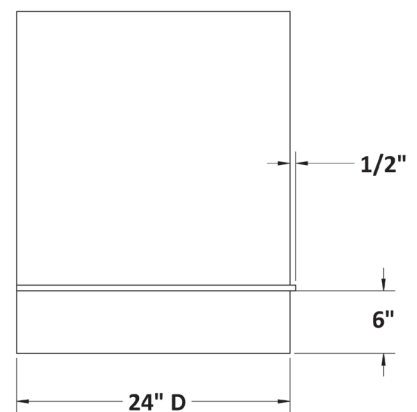

48" SIDE VIEW

THE LOGE HOOD

PRODUCT FEATURES

Quiet Operation

Large 3 speed blower operates at lower RPM reducing the sound level.

Lighting

Bright LED lighting offers natural looking, 3000K color spectrum. The 36" hood features 2 lights, the 48" hood features 3 lights.

Ease of Operation

Electronic touch controls for 3 speed blower and LED lights.

Easy Cleaning

Dishwasher safe, commercial style baffle filters for effectively removing airborne contaminants.


Detergent inlet holes and grease exit holes in baffle filters for superior dishwasher cleaning.

Flexible Installation


Mounting bars at top and bottom allow for attaching to stud supports. Open top and back design for centered duct location or offset top duct and/or rear offset discharge.

Energy Efficient Operation


LED light bulbs draw only 6 watts each and energy efficient motors draw only 2.5 amps.

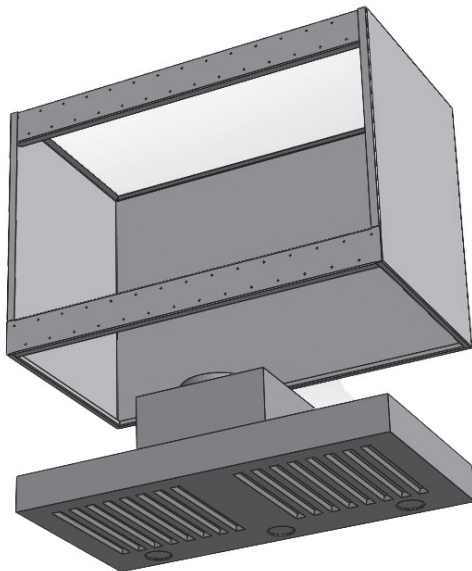

Rear view showing liner is easily removed and reinstalled for simply mounting of hood shell to the wall

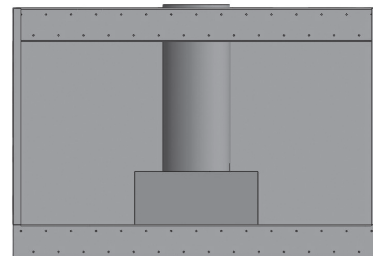

Rear view of standard, centered top venting.
Open top design allowing simple R/L offset top ducting

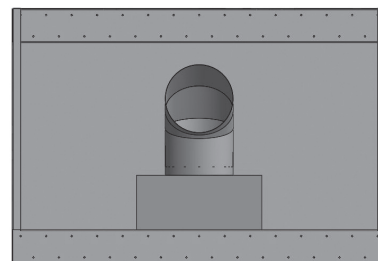

Rear view of standard, centered rear venting.
Open back design allowing simple R/L offset rear ducting